

Part Number

Customer

Category	Parameter	Specification	Measurement Method	
OverallWafer	1.0	Diameter	100.00 +/- 0.30 mm	
	2.0	Primary Flat Orientation	{011} +/- 0.5 degree	Wafer Vendor
	3.0	Primary Flat Length	32.50 +/- 2.50 mm	Wafer Vendor
	4.0	Secondary Flat Orientation	semi std or none	
	5.0	Overall Thickness	282.00 +/- 10.00 $\mu$ m	ADE, 100%
	6.0	Total Thickness Variation (TTV)	<3.00 $\mu$ m	Guaranteed by Process
	7.0	Bow	<50.00 $\mu$ m	ADE to ASTM F534, 20%
	8.0	Warp	<50.00 $\mu$ m	ADE ASTM standard measurement
	9.0	Edge Chips	0	Bright Light, 100% (note 2)
	10.0	Edge Exclusion	5mm	
HandleSilicon	11.0	Handle Growth Method	CZ	Wafer Vendor
	12.0	Handle Orientation	{100} +/- 0.5 degree	Wafer Vendor
	13.0	Handle Thickness	200.00 +/- 5.00 $\mu$ m	ADE, 100%
	14.0	Handle Doping Type	P	Wafer Vendor
	15.0	Handle Dopant	Boron	Wafer Vendor
	16.0	Handle Resistivity	10 - 20 Ohmcm,	Wafer Vendor
	17.0	Backside Finish	Polished with 2 um oxide and lasermark	Wafer Vendor
BuriedOxide	18.0	Oxide Type	Thermal	
	19.0	Oxide Thickness	20,000.00 +/- 1,000.00 A	Nanospec centre point, 4%
	19.5	Oxide formed on	Handle Wafer	
DeviceSilicon	20.0	Device Growth Method	CZ	Wafer Vendor
	21.0	Device Orientation	{100} +/- 0.5 degree	Wafer Vendor
	22.0	Nominal Thickness	80.00 +/- 0.50 $\mu$ m	FTIR, 100% 9-Pt (note3)
	23.0	Distance to device silicon edge from wafer edge	<= 1.5mm	Defined
	24.0	Device Doping Type	P	Wafer Vendor
	25.0	Device Dopant	Boron	Wafer Vendor
	26.0	Device Resistivity	10 - 20 Ohmcm	Wafer Vendor
	26.5	Buried Layer Implant	none	implant vendor
	28.0	Voids	0	Bright Light, 100% (note 2)
	29.0	Scratches	0	Bright Light, 100% (note 2)
30.0	Haze	none	Bright Light, 100% (note 2)	

Part Number	Customer
-------------	----------

Category	Parameter	Specification	Measurement Method
----------	-----------	---------------	--------------------


Shipping Details	Wafer per box :	Max 25
	Packaging :	Taped Polypropylene Wafer Box Empak, Ultrapak, 100.00mm Antistatic Double Bagging
	Lot Shipment Data	Device Thickness Bow / Warp Data Handle and SOI Thickness



Explanatory Notes 1. Microscope inspection performed using microscope scan as below. 5x objective.

2. All bright light inspections performed exclude all wafer area outside the edge exclusion defined in Overall Wafer, Edge Exclusion. High intensity bright lamp inspection as per ASTM F523.

3. 9 point measurement are as shown in the diagram below:

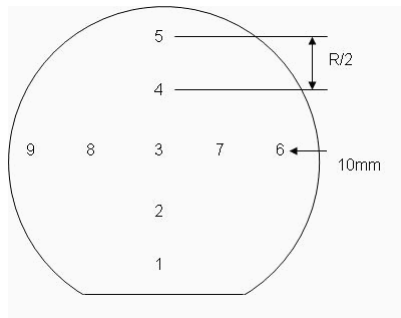

Additional Information